


**HIAB**

Hiab is part of Cargotec Corporation

Version		HIAB 288 EP-5 HiDuo
M _{dyn}		334 kNm
Lifting capacity	kNm	227
Lifting capacity	tm	23,1
Lifting capacity (ADC)	kNm	246
Lifting capacity (ADC)	tm	25,1
Outreach - lifting capacity, standard	m-kg	2,6 - 9 400
		4,5 - 5 600
		6,2 - 3 900
		8,2 - 2 840
		10,4 - 2 160
		12,7 - 1 740
		15,0 - 1 460
Outreach - lifting capacity, manual extensions	m-kg	17,2 - 1 200
Hydraulic outreach, standard	m	15,1
Outreach, manual extensions	m	17,3
Rec. oil flow	l/min	70 - 90
Slewing angle	Ø	190 - 420
Max slope viable at full capacity	°	5
Slewing torque, gross	kNm	34,0
Slewing speed	°/s	15
Lifting speed at standard hydraulic outreach	m/s	2,3
Height in folded position	mm	2 335
Width in folded position	mm	2 500
Install space required with hose and pipe kit	mm	1 192
Weight		
Crane in standard version without support legs	kg	3 150
Support leg equipment	kg	381 - 478

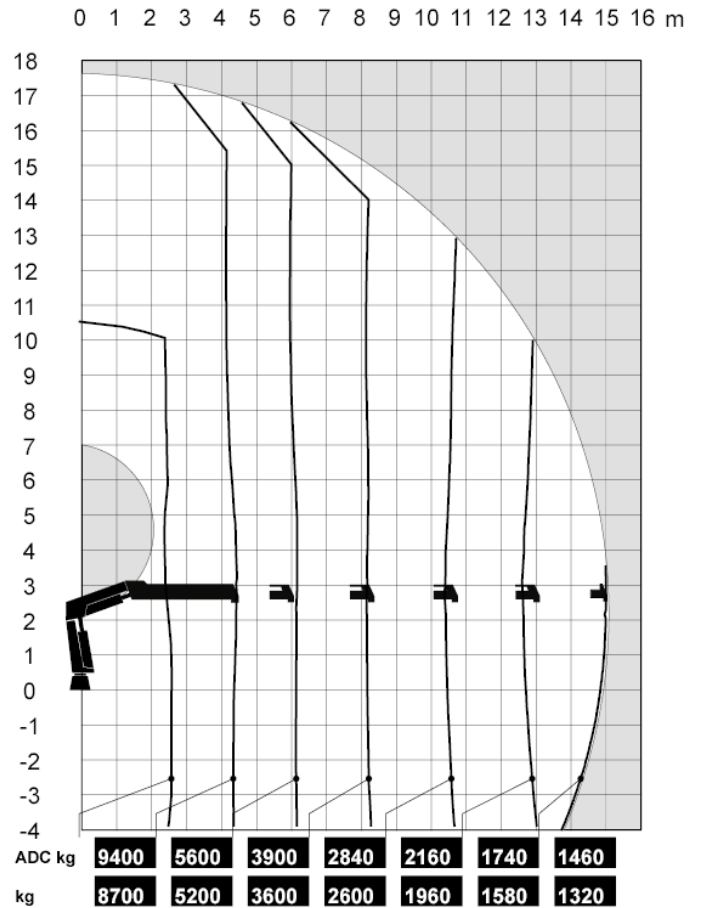

HIAB XS 288 EP-5 HIDUO