


**HIAB**

Hiab is part of Cargotec Corporation

Version		HIAB 088 B-2 Duo	
Lifting capacity	kNm	69	
Lifting capacity	tm	7,0	
Lifting capacity (ADC)	kNm	74	
Lifting capacity (ADC)	tm	7,5	
Outreach - lifting capacity, standard	m-kg	2,9 - 2 700	
		3,8 - 2 000	
		5,4 - 1 380	
		7,3 - 1 020	
Outreach - lifting capacity, manual extensions	m-kg	9,2 - 760	
		11,3 - 580	
Hydraulic outreach, standard	m	7,7	
Outreach, manual extensions	m	11,8	
Rec. oil flow	l/min	40 - 45	
Working pressure	Mpa	31,0	
Slewing angle	Ø	400 - 406	
Max slope viable at full capacity	°	5	
Slewing torque, gross	kNm	10,7	
Slewing speed	°/s	15	
Lifting speed at standard hydraulic outreach	m/s	1,4	
Height in folded position	mm	2 000	
Width in folded position	mm	2 190	
Install space required with hose and pipe kit	mm	795	
Weight			
Crane in standard version without support legs	kg	1 080	
Support leg equipment	kg	140 - 275	

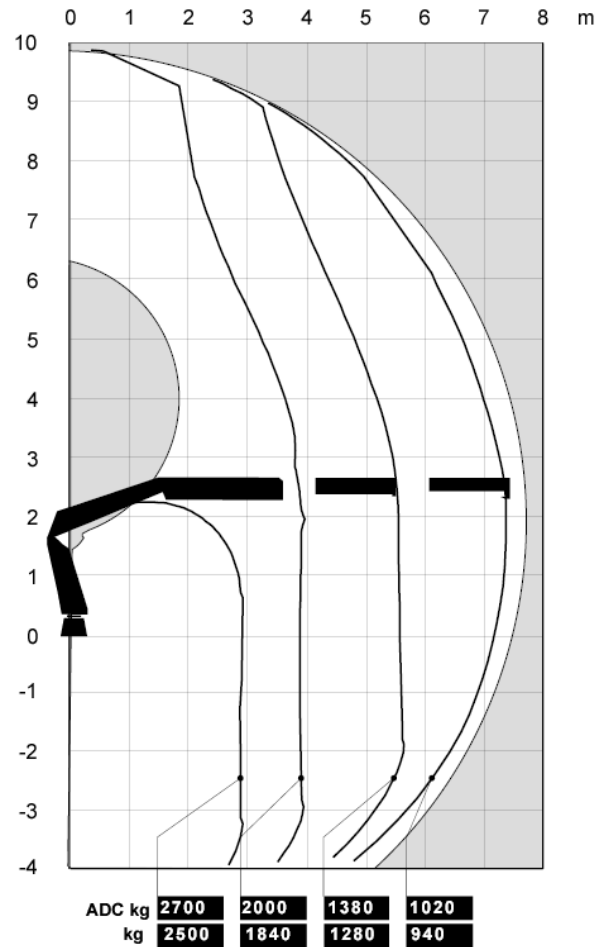

HIAB XS 088 B-2 DUO